

## DF 32-L1 PCI

### Special Board for SINEC-L1

#### □ Description

SINEC-L1 is a wide-spread fieldbus system for non time-critical control and visualization tasks.

The range of available devices comprises single terminals up to the complete product family of the Siemens Simatic series (S5/S7).


DF 32-L1 PCI is a special board for the connection of the SINEC-L1 bus. It has proven its reliability in thousands of installations. DF 32-L1 is fully compliant to all systems using the SINEC-L1 protocol. It reduces the CPU load reliably from the time-consuming processing of the SINEC-L1 protocol.

The OPC-Server for Windows NT enables the trouble-free integration of the board into control and visualization systems of the latest generation.


DF 32-L1 PCI – an outstanding example of reliability.

#### □ Technical Data

<b>PCI Interface</b>	32bit ISA-interface
<b>Dual Port RAM</b>	128 Kbyte
<b>Power Supply</b>	Potential-free +5V for SINEC-L1 bus (full SINEC-L1 compliance)
<b>Baud Rate</b>	Fixed on 9.600 Bit/s Master/Slave configurable

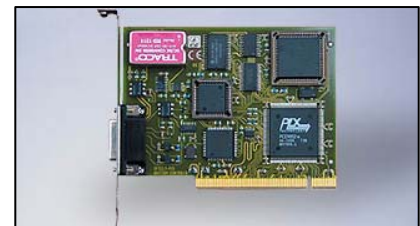

*DF32-L1 PCI*



**Order Numbers**

<b>Order No.</b>	<b>Item</b>
4000-2-6 1 0H -3-*	<b>DF 32-L1 PCI Board incl. Protocol Driver</b>
4000-2-6 <input type="checkbox"/> 1 -3-*	<b>Board Driver PCI</b>
D	LINUX driver
M	Windows 2000/XP driver
	<b>Additional Software Package</b>
4000-S-L M 4 - 3-*	OPC-Server for SINEC-L1 for Windows 2000/XP
4000-S-L M 2 - 3-*	Configurator for SINEC-L1 for Windows 2000/XP

\* Please complete the order number either with E for a documentation in English or D for a documentation in German.