



## DF PROFINET IO

### PROFINET IO Controller Board

#### □ Description

The COMSOFT DF PROFINET IO board operates as a PN IO Controller. Because its efficiency is so huge, the new board achieves operations of 64 PROFINET devices per millisecond in the performance class RT.

A second independent Ethernet interface is optionally available, so the board can therefore operate two PROFINET networks at the same time. Among the cyclic data traffic, all acyclic read/write/diagnosis and alarm functions are supported – and of course compatible to the PN IO standard of PROFIBUS & PROFINET International, the umbrella organisation.

The size of the process image of the card's I/O data is 16 Kbyte (8 Kbyte

input and 8 Kbyte output data). The PROFINET configuration data is stored in a failsafe Flash Type Memory. The Controller board also supports PROFINET supervisor functionality. This means that it is possible to scan the network as well as to control the names and IP addresses of the various PROFINET devices.

COMSOFT's CONFIGURATOR III is available for compilation and download of the PROFINET configuration. The comfortable and full graphical tool minimises the configuration effort, while extensive download, analysis and control functions permit an efficient check-up of the configured PROFINET IO network. The compiled configuration is then stored in XML format, allowing

an easy integration into third party applications. Drivers for all current operating systems are also available and an OPC UA Server is planned for a later release date. A LabVIEW™ PROFINET VISA Driver is already available.

#### LabVIEW™ PROFINET VISA Driver


The LabVIEW™ PROFINET VISA Driver equips National Instruments' LabVIEW™ with a real-time PROFINET IO connection. The installation in a classical PC system under LabVIEW™ for Windows is just as possible as in a real-time PXI system under LabVIEW™ RT, e.g. as a high performance PAC system for time-critical test applications or industrial automation applications.

#### □ Technical Data


Available Types	PCI and CPCI (PCI-Express is planned)
Operation Mode	PN IO Controller
PROFINET IO Performance Class	Class B ( $\geq 1$ ms)
Ethernet Interface	RJ45 100 Base-T(X)



*DF PROFINET IO PCI*

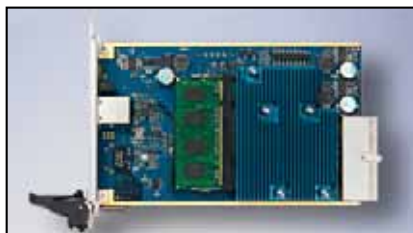

*DF PROFINET IO CPCI*



□ Order Numbers

Order No.	Item
1011075	DF PROFINET IO PCI with Windows XP/7 driver
1011076	Linux driver (currently not available)
1011088	LabVIEW PROFINET VISA driver for Windows XP/7 and LabVIEW RT
1011089	DF PROFINET IO CPCI with Windows XP/7 driver
1011090	Linux driver (currently not available)
1011093	LabVIEW PROFINET VISA driver for Windows XP/7 and LabVIEW RT

详细资料？请通过[sales@hkaco.com](mailto:sales@hkaco.com)联系我们。

上海：021-6728 2707

北京：010-5781 5040

广州：400 999 3848

西安：029-8187 3816

扫一扫  
加微信



**HongKe**

虹科

hkaco.com

广州虹科电子科技有限公司

测试测量和控制产品 | 定制 | 培训

华南理工大学国家大学科技园2-504